

Elektromagnetkupplungen  
0.6 – 3.6 Nm

Electromagnetic clutches  
0.6 – 3.6 Nm


Embrayages électromagnétiques  
0.6 – 3.6 Nm

Flanschmontierte Kupplung

Flange-mounted clutch

Embrayages monté sur bride

Type 14.100.--.113

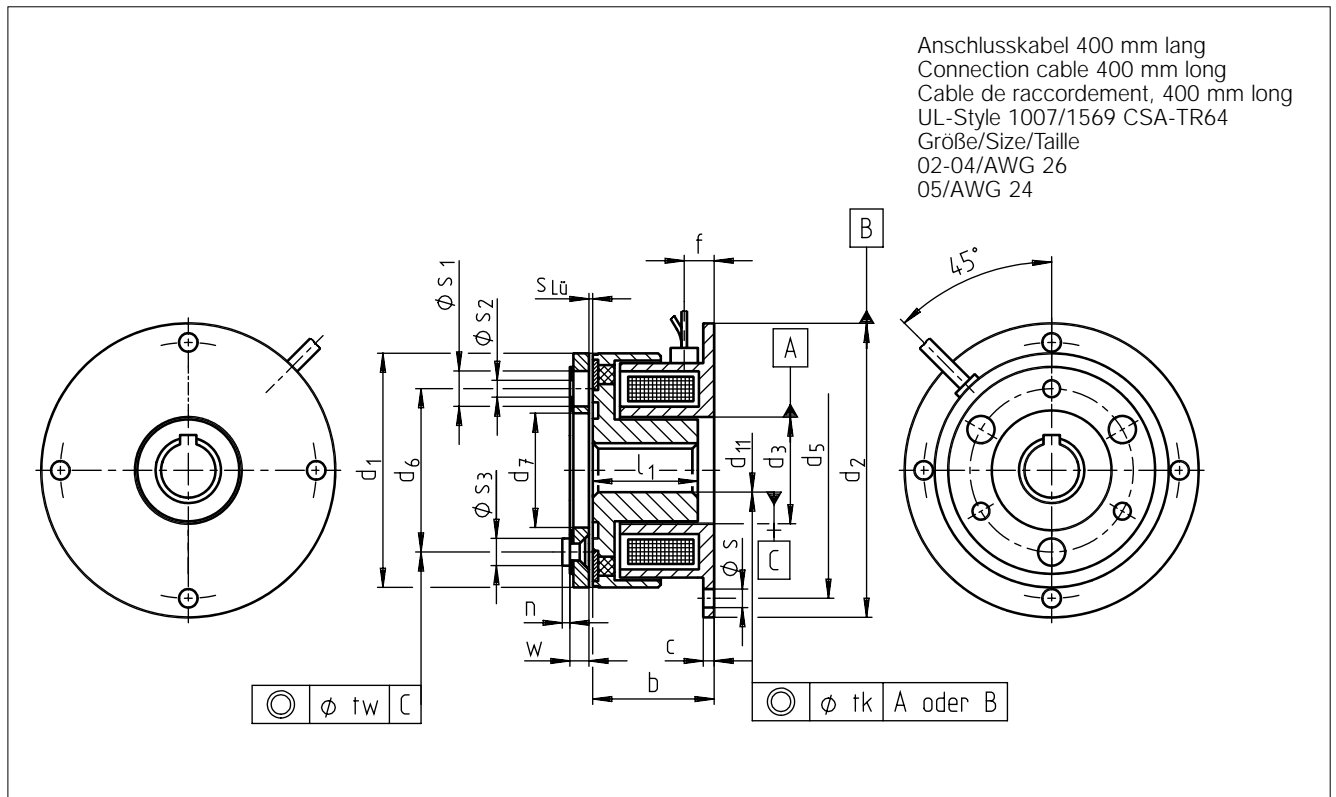

Größe Size Taille	M [Nm]	b	c	d <sub>1</sub>	d <sub>2</sub> h9	d <sub>3</sub> H8	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	d <sub>11</sub> H7 Standard			f
02	0.6	16	1.5	31	39	11	33.5	19.5	12.5	5	6		4
03	0.9	19	2	34	45	13	38	23	15	5	6		4.5
04	1.8	22.3	2	43	54	19	47	30	21	6	8	10	5.5
05	3.6	23.5	2	54	65	26	58	38	29	10	12	15	5.5

Maße in mm  
Passfedernut nach DIN 6885/1-P9

Dimensions in mm  
Keyway to DIN 6885/1-P9

Cotes en mm  
Rainure de clavette selon DIN 6885/1-P9

Größe Size Taille	l <sub>1</sub>	n	s	s <sub>1</sub>	s <sub>2</sub>	s <sub>3</sub>	S <sub>Lü</sub>	t <sub>k</sub>	t <sub>w</sub>	w	Magnetteil Stator Corps induct. m [kg]	Rotor Rotor Rotor m [kg]	Ankerteil Armature Armature m [kg]
02	14	0.8	3.4	2x5	2x2.1	2x3.7	0.1	0.06	0.03	2.25	0.036	0.021	0.009
03	17	1.2	3.4	3x6	3x2.6	3x4.5	0.15	0.06	0.03	2.4	0.034	0.034	0.011
04	19.3	1.6	3.4	3x6.5	3x3.1	3x5	0.15	0.06	0.03	2.95	0.100	0.070	0.023
05	20.5	1.6	3.4	3x6.5	3x3.1	3x5	0.2	0.06	0.03	3.0	0.150	0.110	0.033

Maße in mm  
Passfedernut nach DIN 6885/1-P9

Dimensions in mm  
Keyway to DIN 6885/1-P9

Cotes en mm  
Rainure de clavette selon DIN 6885/1-P9